# **GR3/GR4-SERIES**

Guide Rails



# For use with LSS-Series and LSV-Series pumps

#### Features

- Class 30 heavy cast iron construction
- Sized for 2" rail pipes (not included)
- Durable nitrile sealing grommet
- Upper stainless steel rail support and mid guide rail support bracket included
- Powder coated for corrosion resistance
- $\bullet$  Available in 3" and 4"  $\mathsf{ANSI}^{\mathbb{R}}$
- Maximum pump weight 750 lbs (340 kg)



Mid Support Bracket

#### Models

MODEL	ANSI SIZE	WEIGHT IN LBS	SERIES
GR3-ANSI	3"	137	LSS
GR4-ANSI	4"	150	LSV





# innovate. evolve.

# **GR3/GR4-Series**

### Material

Class 30 gray cast iron

#### Seal

Heavy duty nitrile

# **Rail Size**

2" (Not included)

# Discharge

INTERMEDIATE

GUIDE RAILS

SET AT 7

INTERVALS

All flanges are machined to ANSI 150 lb specifications (See chart for model-specific information)

# **Maximum Pump Weight**

750 lbs


### Upper and Mid Guide Rail Support

Stainless steel

### **Claw Attachment Bolts**

5/8" - 11 x 1.5" Stainless steel

## **Dimensional Data**

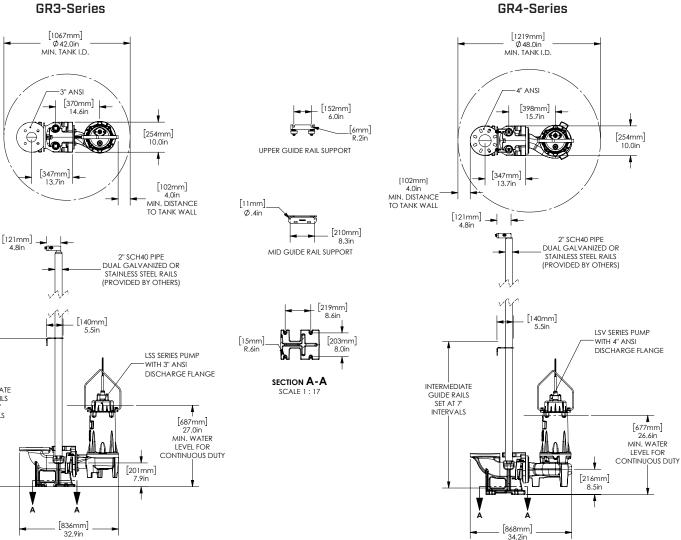

**GR4-Series** 

Specifications subject to change without notice. Copyright © Liberty Pumps, Inc. 2024 All rights reserved. LLIT006793-R02/24