

# EPAK-SERIES

Unassembled Grinder System with Alarm

**Liberty Pumps®**

A Family and Employee Owned Company

## 2 hp Omnivore Grinder Pump

[Automatic Model LSG202A]

**24" and 30" Diameter Basins**  
**Fiberglass with Anti-Flotation Collar**

**1-1/4" Discharge**

### Features

- Solid fiberglass cover
- Pre-cut internal piping (1-1/4" schedule 80 PVC)
- Heavy-duty check valve
- Ball valve
- 2" electrical conduit hub (unmounted)
- 4" inlet seal (unmounted)
- ALM-2W (indoor/outdoor) alarm



ALM-2W Alarm



innovate. evolve.

# EPAK-Series




## Model LSG202A Grinder Pump

- 2 hp, 208-230V, 1-Phase, 60 Hz, 15A, 3450 RPM
  - Discharge 1-1/4"
  - Cable length 25'
- (See LSG200-Series literature for complete pump specifications)

## Alarm ALM-2W

- Indoor/Outdoor type 3R
- 115V
- Red beacon
- 82 db horn
- Test/Silence switch
- Auxiliary contacts


## Performance Curve

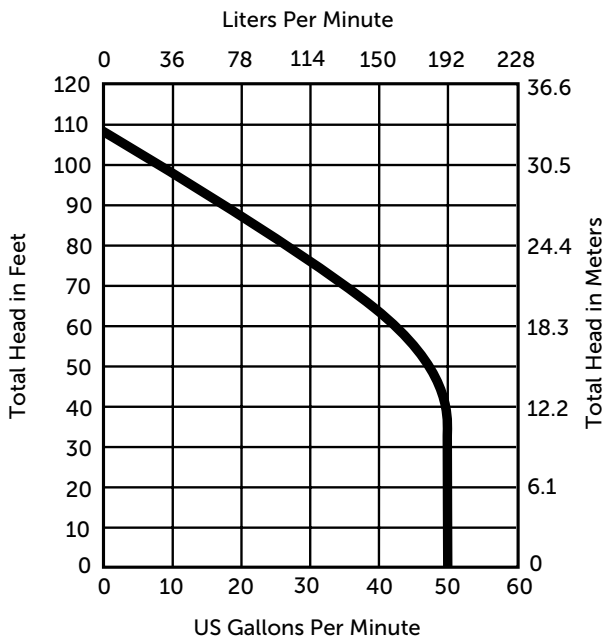

## Internal Piping Kit (#K001171) Includes

- 1-1/4" Check valve
- 1-1/4" Ball valve
- Elbow 90°
- G90 cast iron pump elbow

## Dimensional Data

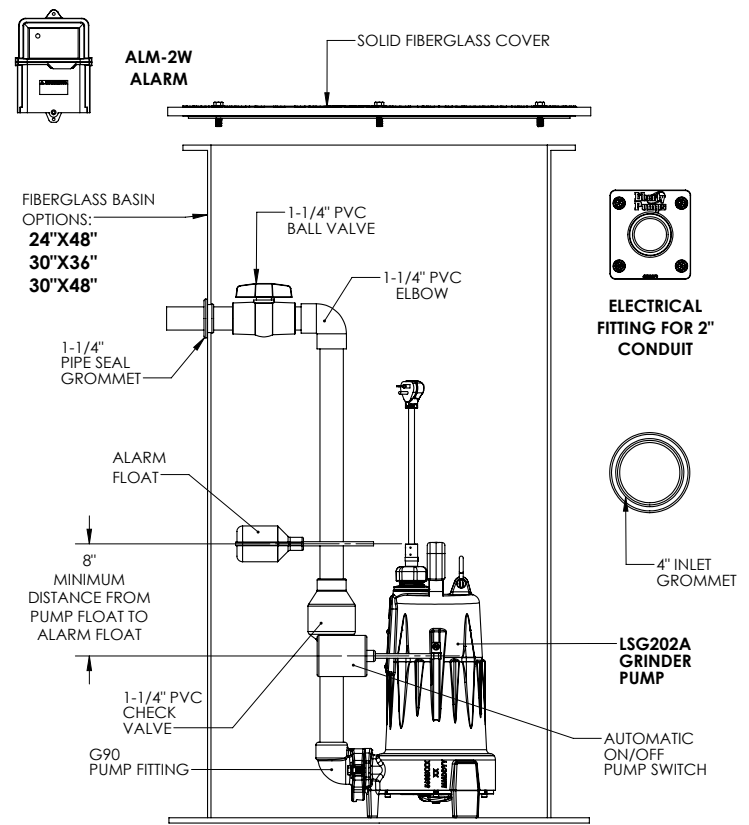

EPAK-LSG System is unassembled.  
All internal piping components shown in above diagram included with system.

## Models

MODEL	BASIN WIDTH	BASIN HEIGHT	BASIN CAPACITY	GALLONS PER CYCLE	WEIGHT
EPAK-LSG	24"	48"	94 Gallons	14 Gallons	194 lbs
EPAK-3036LSG	30"	36"	110 Gallons	21 Gallons	216 lbs
EPAK-3048LSG	30"	48"	147 Gallons	21 Gallons	228 lbs